

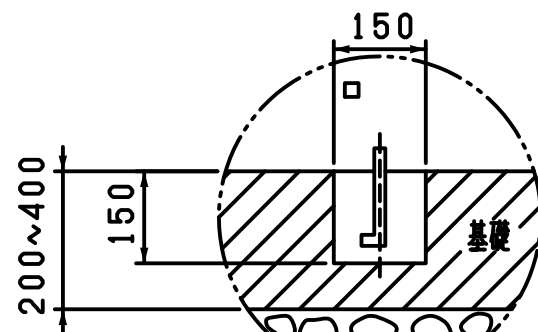
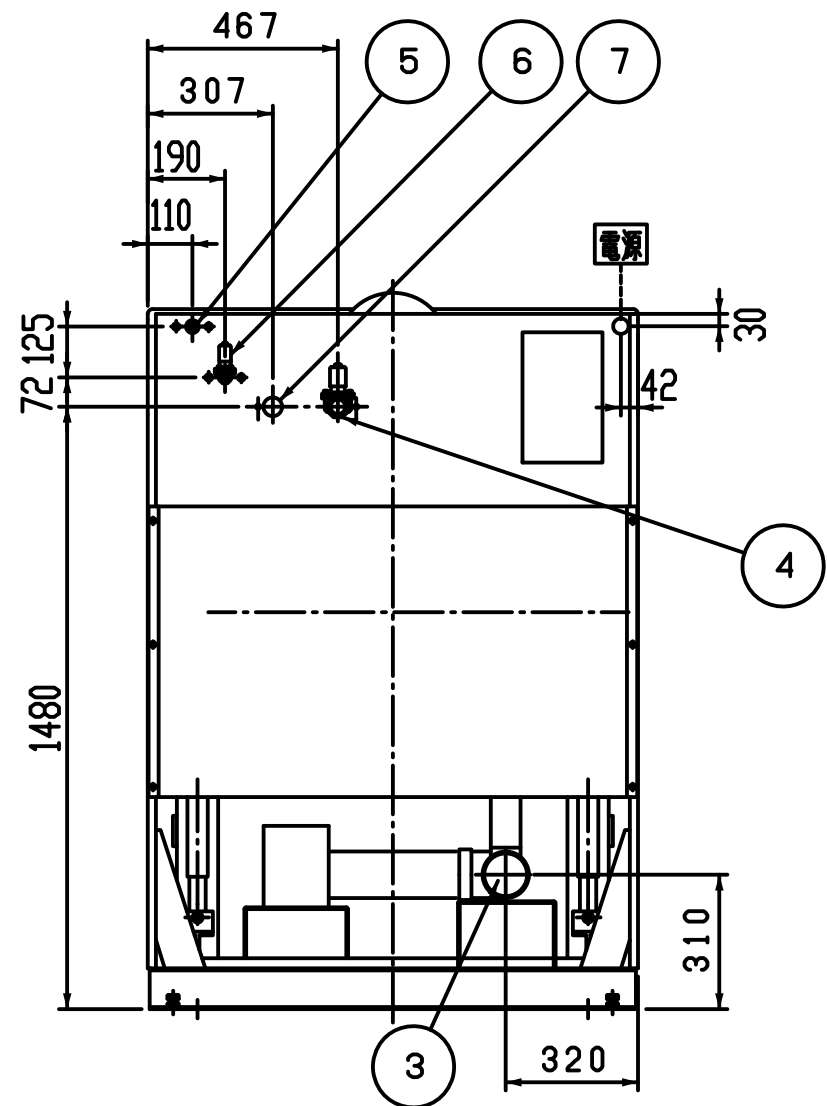
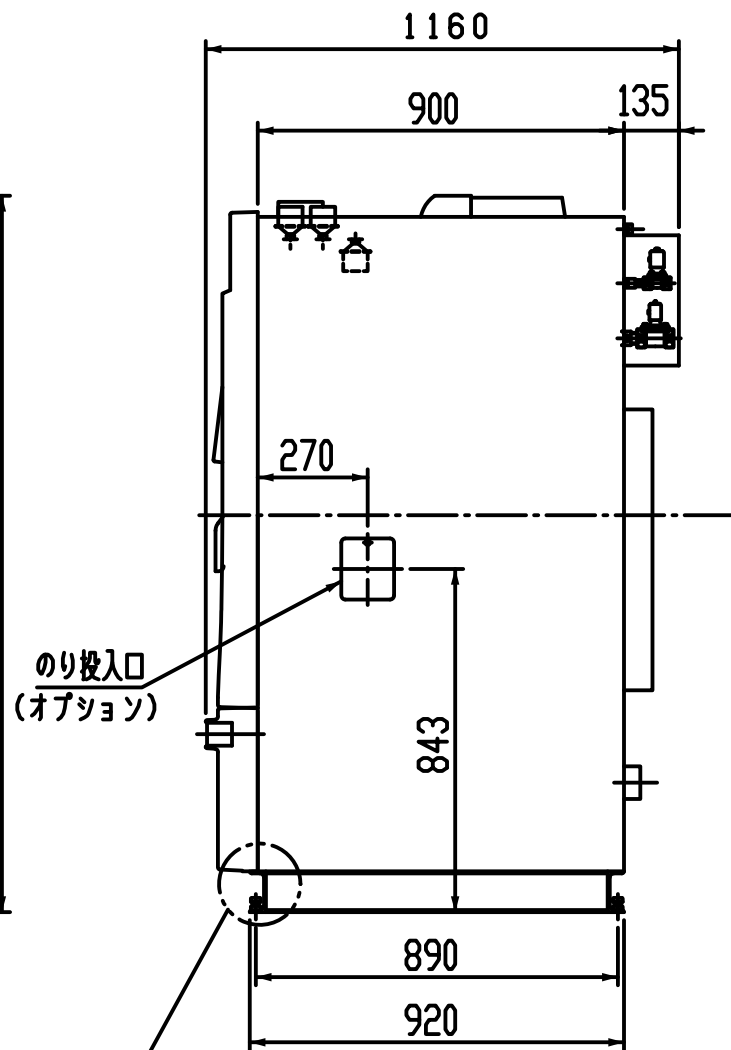


図面変更日		
△	-	-
△	-	-
△	-	-

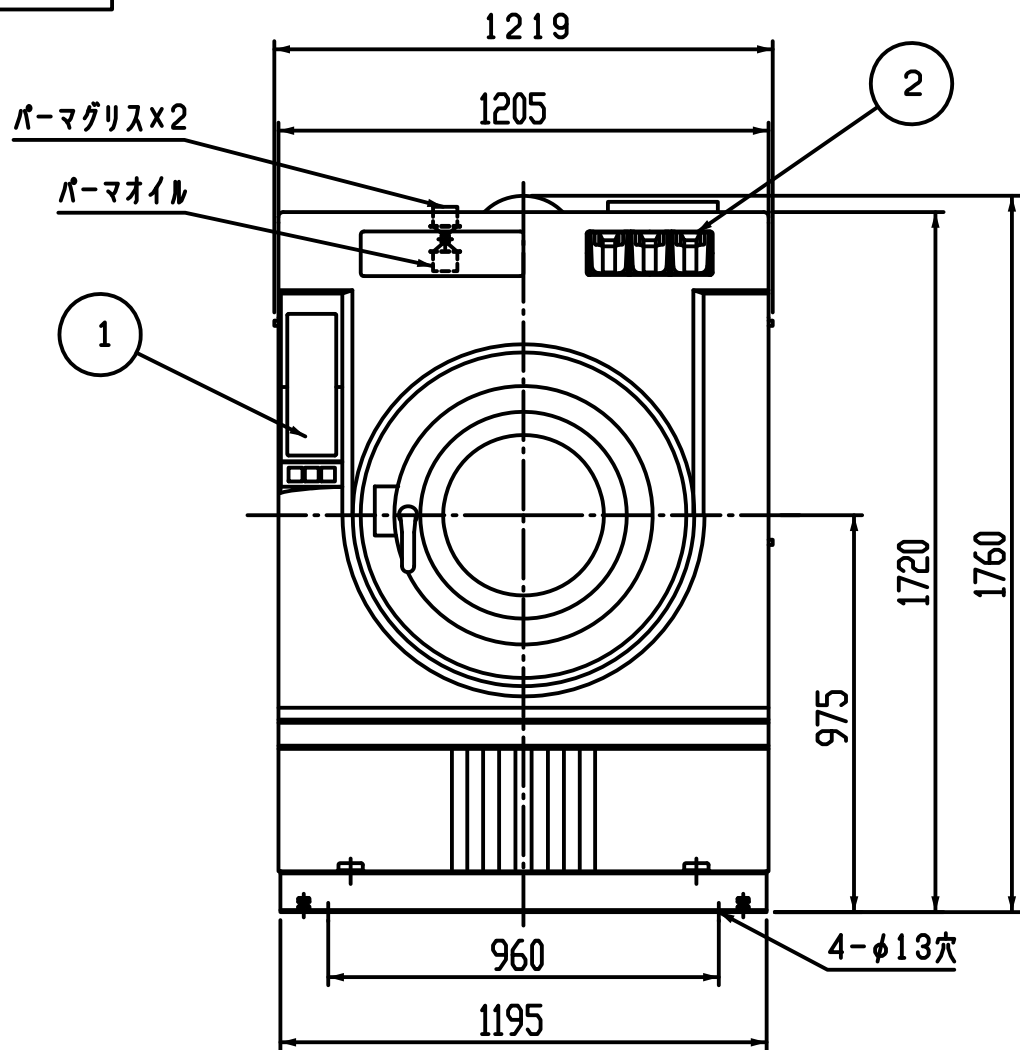

φ12×6時のアンカーボルト使用の場合

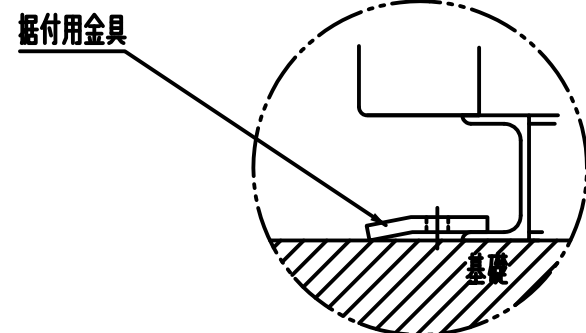

据付金具使用の場合

- ※) 機械の水平をだしてから据え付けのこと。
- ※) 据え付けはベッド又は 附属の据え付け金具を利用のこと。
- ※) 据え付け時 輸送用金具を必ずはずすこと。
- ※) 本仕様は改良の為変更することがあります。

7	給湯□		3 2 A	1	(オプション)
6	給蒸□		1 5 A	1	
5	給水□ (B)		1 5 A	1	
4	給水□ (A)		3 2 A	1	
3	排水□		1 0 0 A	1	
2	洗剤投入□			1	
1	コントロールプレート			1	
番号	部品名	材質	寸法	個数	備考
設計	製図	担当	検図	承認	外形図 G 3 - W I 2 2 3

仕 様				
洗濯容量	22Kg (JIMS19.5)	回 転 数 (rpm)	洗 淨	32~42
機 械 寸 法	(巾1219奥1160高1760)		パワス	(62)
制 御 方 法	マイコン制御		中速脱水	85
ドラム寸法	920×400		高速脱水	400~810
モーター容量 (Kw/極数)	3.7Kw/6p インバーター	給 水 口 径 (A)		32
洗 剤 投 入 方 式	自動3連式	給 蒸 口 径 (A)		15
電 源	AC200V 3相 50/60Hz	排 水 口 径 (A)		100